

uniq-wall

redefining spaces

[soli]tude Acoustic operable moving walls

[soli]tude is the ultimate in terms of acoustic integrity, achieving the very highest possible sound ratings.

Both our Twin Point and Single Point systems glide along a recessed or surface-mounted ceiling track, leaving the floor free of any track or obstruction.

Complex track layouts can be specified for unlimited room configuration options, and an almost unlimited plethora of finishes provides endless design opportunities. Available in manual and semi-auto electrically operated versions.




[soli]tude


Acoustic operable moving walls

- 1.Expanding Jamb
- 2.E-Basic Panel
- 3.Standard Panel
- 4. Fixed Jamb
- 5.Single Point
- 6. Twin Point
- 7. Floor Seal
- 8. SP with Pelmet
- 9. TP with Pelmet

TECHNICAL DETAILS

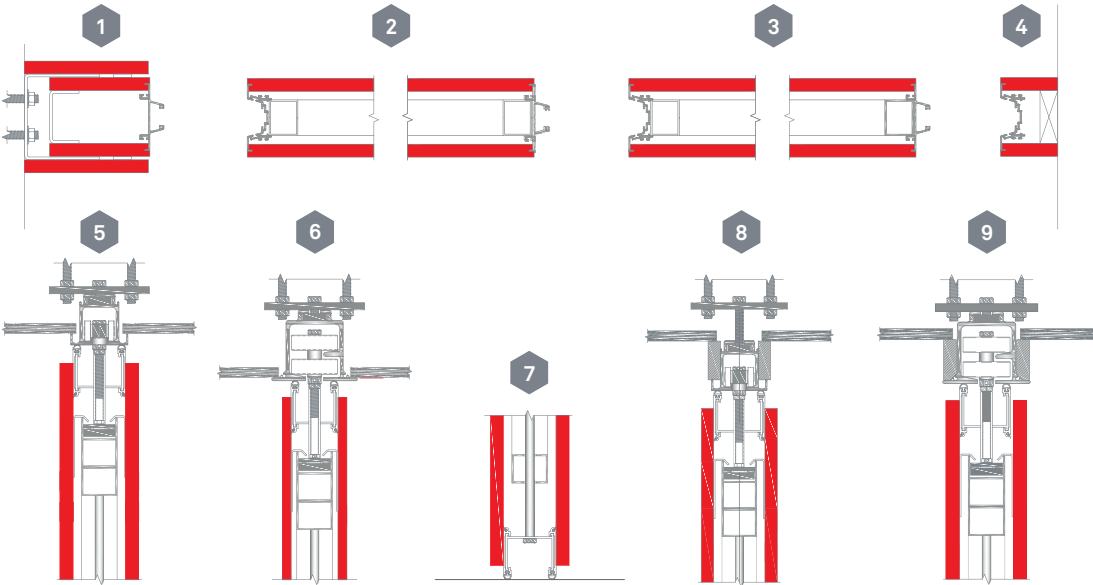

STANDARD STACKING CONFIGURATIONS

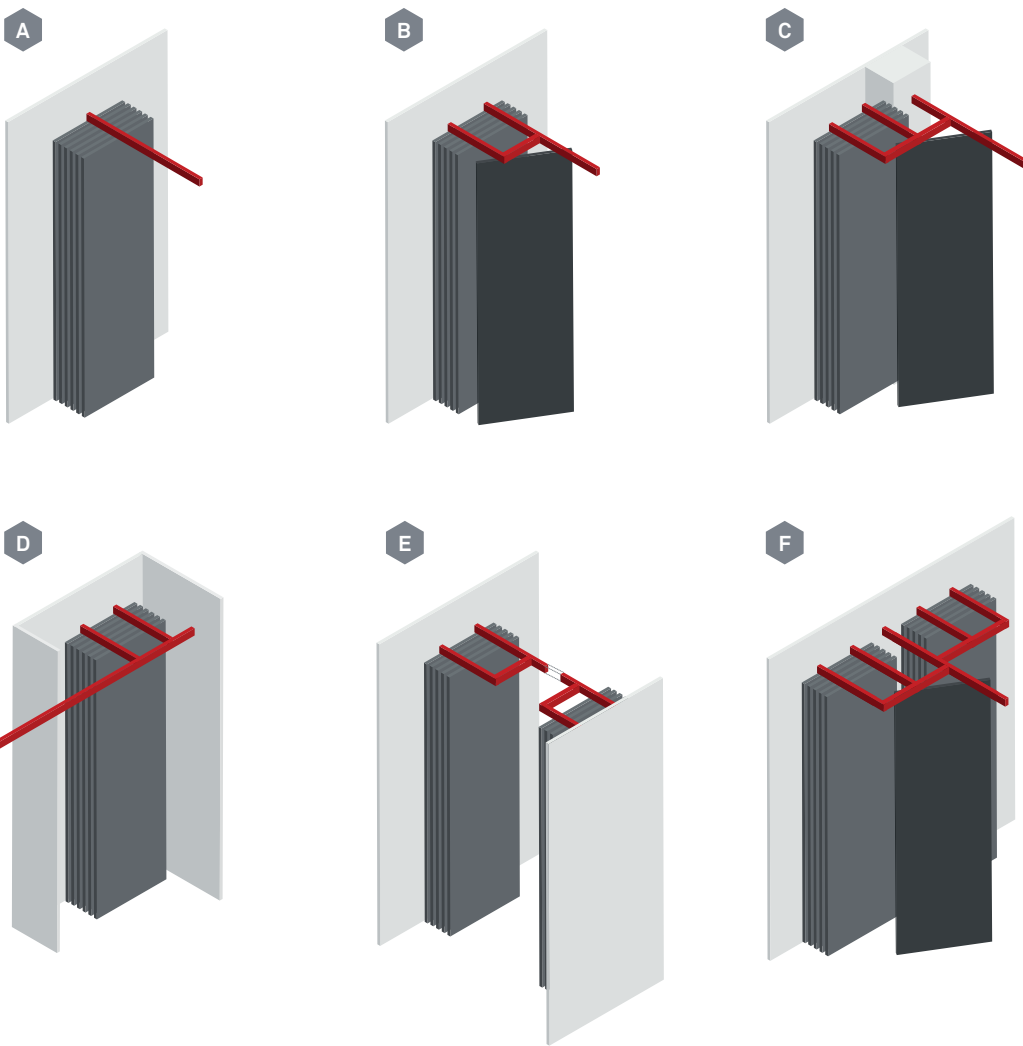

Please note:

Panel thickness will vary depending on system type.

Other stacking options are available on request.

Please contact uniq-wall for further details.

*Anything over 3750mm must be TP.

Contact Creatif for special requirements.

- Numbers in brackets () represent system availability
- Other finish types available:**
- » Magnetic
 - » Drywipe
 - » Pinnable
 - » Printed board
 - » Veneer
 - » OSB
 - » Glass


Numbers in Brackets () represent system availability

For constraints and variations contact uniq-wall: info@uniqwall.ca


Ironmongery and Vision panels subject to constraints, contact us for Information

TECHNICAL INFORMATION	[soli]tude			
	116	122	134	Pass Door
Acoustic rating STC	47	52	54	46
Panel thickness	116mm	122mm	varies	varies
Weight KG/M2	47KG	64KG	varies	varies
Max. height	5000mm*	5000mm*	5000mm*	4000mm*
Max. panel width	1220mm	1220mm	1220mm	1220mm
Panel construction	Aluminium (inc. steel over 3m)	Aluminium (inc. steel over 3m)	Aluminium (inc. steel over 3m)	Aluminium and steel
Operable seal	Manual or Electric	Manual or Electric	Manual or Electric	Manual or Electric
Panel construction	MFC – 18mm	MFC – 25mm	MDF – 15mm + fabric	varies
Track system	Aluminium TP + SP	Aluminium TP + SP	Aluminium TP + SP	Aluminium TP + SP
Tolerance height MM	-/+ 5mm	-/+ 5mm	-/+ 5mm	-/+ 5mm
Tolerance width MM	-/+ 10mm	-/+ 10mm	-/+ 10mm	-/+ 10mm

SWATCHES

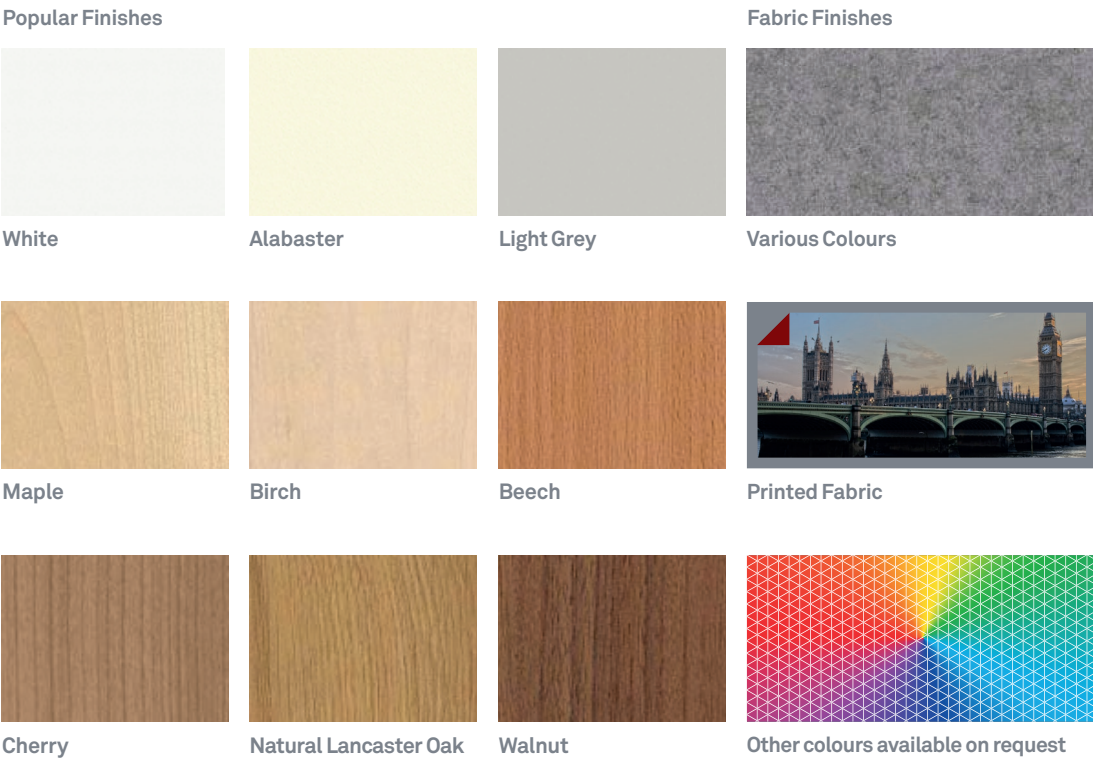

AVAILABLE PANELS ELEVATIONS

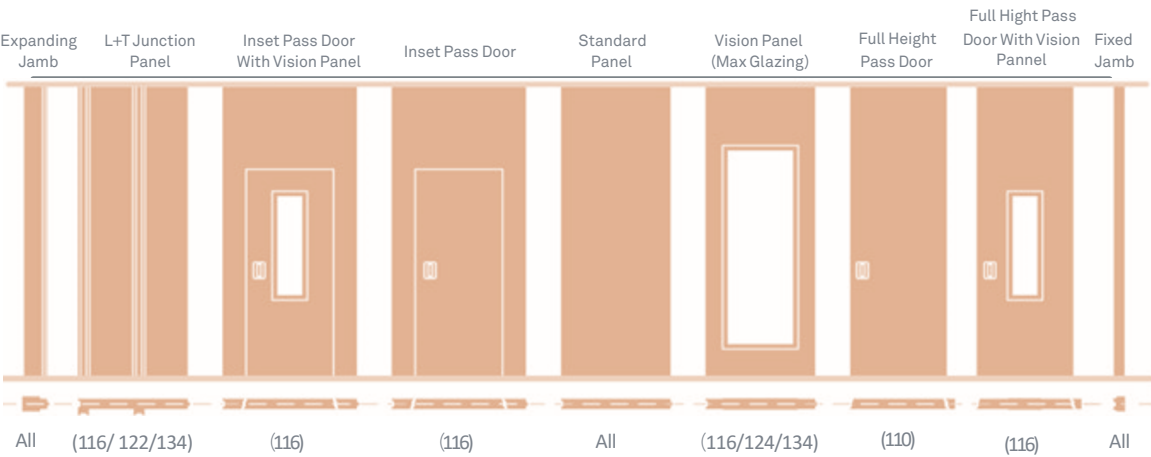



FEATURES & BENEFITS

- » Offers space flexibility – configurable space.
- » High acoustic integrity – minimal noise transfer between spaces.
- » Huge variety of finishes – enhanced aesthetics and variety of practical uses.
- » Manual or electrically operated seals (top, bottom and expandable– ease and speed of use.
- » Multiple panel options and sizes – tailored to suit the specific space.
- » No floor track – unbroken floor surface.

uniq-wall
redefining spaces

Head Office
1472 Thornton Road N, B14
Oshawa, ON Canada
LOB 1A0

T 416-335-9119
F 1-888-347-9909
E info@uniqwall.ca

www.uniqwall.ca

Rev Sept 2020